


BX88371

Single Pull Immobilizer, 2" Installation Instructions

The BX88371 Single Pull Immobilizer Kit is designed to be used with most 2" receiver hitches. The immobilizer eliminates or greatly reduces rattling and movement in the receiver hitch.

Tools Required

5/8" Wrench 11/16" Socket Torque Wrench

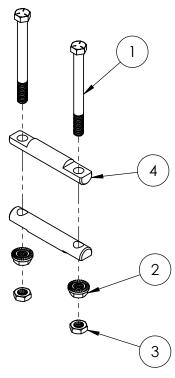

Item No.	Part No.	Description	Qty.
1	201-0560	7/16"-14 x 4-1/2" Hex Head Bolt	, Grade 5, ZP2
		7/16"-14 Whiz Flange Nut, ZP	
		7/16"-14 Jam Nut, ZP	
		Cross Bar, SP, ZP	

Installation Instructions

- 1. Insure the drop receiver or tow bar is pinned into receiver.
- 2. Place 7/16" bolts through one of the cross bars. Place the rounded side of the cross bar just behind the lip of the vehicle receiver tube. Slide second cross bar onto bolts so that the rounded side of the cross bar is facing inward as shown below.
- 3. Install a 7/16" flange nut onto each bolt and tightened down evenly then torque to 23 ft/lbs. Then using a wrench to hold the flange nut stationary, install a 7/16" jam nut onto each bolt and tighten each jam nut evenly to 23 ft/lbs.

BX88371

Single Pull Immobilizer, 2" Installation Instructions

CUSTOMER SERVICE COMMITMENT

Blue Ox® is committed to providing you with exceptional customer care throughout your lifetime with our products. Our team is here to assist you with any questions you may have regarding the performance of your product. Simply call (402) 385-3051 and you can speak with our customer care team.

Additionally, please visit our website to see which rallies our Destination America team will be attending. For a nominal fee, our service technician will service your towing system to ensure it's in proper working condition. Also, as a commitment to our customers, should you visit our factory, you can stay at our full service Blue Ox® campground at no charge along with enjoying a factory tour.

Again, thank you for being our customer and for the confidence you have shown in the performance of our products. It is because of customers like you we enjoy the success we have today.